




NTL BEARINGS LTD.

S7013 CD/P4A SKF High Speed Angular Contact Ball Bearings

Bearing No. S7013 CD/P4A

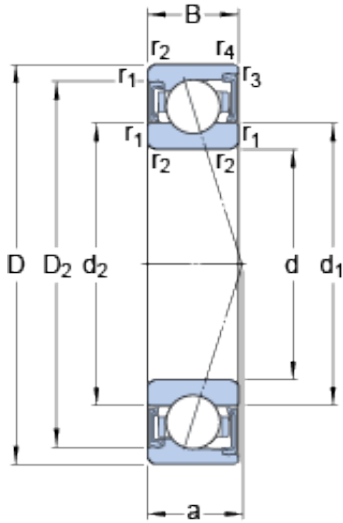

S7013 CD/P4A Bearing 2D drawings and 3D CAD models

Size	100x65x18 mm
Bore Diameter	100 mm
Outer Diameter	65 mm
Width	18 mm
d	65 mm
D	100 mm
B	18 mm
d ₁	75.8 mm
d ₂	75.8 mm
D ₂	91.73 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	0.6 mm
a	20.1 mm
d _a - min.	71 mm
d _a - max.	75.2 mm
d _b - min.	71 mm
d _b - max.	75.2 mm
D _a - max.	94 mm
D _b - max.	96.8 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
Basic dynamic load rating - C	41.6 kN
Basic static load rating - C ₀	37.5 kN
Fatigue load limit - P _u	1.6 kN



NTL BEARINGS LTD.

Limiting speed for grease lubrication	14000 r/min
Ball - D_w	11.112 mm
Ball - z	20
Calculation factor - f_0	15.6
Preload class A - G_A	160 N
Preload class B - G_B	320 N
Preload class C - G_C	640 N
Preload class D - G_D	1280 N
Calculation factor - f	1.13
Calculation factor - f	1
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.02
Calculation factor - f_{2C}	1.05
Calculation factor - f_{2D}	1.09
Calculation factor - f_{HC}	1
Preload class A	74 N/micron
Preload class B	101 N/micron
Preload class C	143 N/micron
Preload class D	207 N/micron
Category	Precision Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0
Product Group	B04270
Enclosure	2 Seals
Precision Class	ABEC 7 ISO P4
Material - Ball	Steel
Number of Bearings	1 (Single)
Contact Angle	15 Degree



NTL BEARINGS LTD.

Preload	None
Raceway Style	1 Rib Outer Ring
Cage Material	Phenolic
Rolling Element	Ball Bearing
Enclosure Type	Non Contact Seal
Flush Ground	No
Inch - Metric	Metric
Other Features	Single Row Angular Contact High Capacity Basic Design Corrosion Resistant Ball
Long Description	65MM Bore; 100MM Outside Diameter; 18MM Width; 2 Seals Enclosure; ABEC 7 ISO P4 Precision; Steel Ball Material; 1 (Single) Bearing; 15 Degree Contact Angle; Phenolic Cage Material; 1 Rib Outer Ring
Category	Precision Ball Bearings
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Ball Angular Contact
Manufacturer URL	http://www.skf.com
Outside Diameter	3.937 Inch 100 Millimeter
Bore	2.559 Inch 65 Millimeter
Width	0.709 Inch 18 Millimeter
d ₁	75.8 mm
d ₂	75.8 mm
D ₂	91.73 mm
r _{1,2} min.	1.1 mm
r _{3,4} min.	0.6 mm
d _a min.	71 mm



NTL BEARINGS LTD.

d_a max.	75.2 mm
d_b min.	71 mm
d_b max.	75.2 mm
D_a max.	94 mm
D_b max.	96.8 mm
r_a max.	1 mm
r_b max.	0.6 mm
Basic dynamic load rating C	41.6 kN
Basic static load rating C_0	37.5 kN
Fatigue load limit P_u	1.6 kN
Attainable speed for grease lubrication	14000 r/min
Ball diameter D_w	11.112 mm
Number of balls z	20
Preload class A G_A	160 N
Static axial stiffness, preload class A	74 N/ μ m
Preload class B G_B	320 N
Static axial stiffness, preload class B	101 N/ μ m
Preload class C G_C	640 N
Static axial stiffness, preload class C	143 N/ μ m
Preload class D G_D	1280 N
Static axial stiffness, preload class D	207 N/ μ m
Calculation factor f	1.13
Calculation factor f_1	1
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.02
Calculation factor f_{2C}	1.05
Calculation factor f_{2D}	1.09
Calculation factor f_{HC}	1
Calculation factor f_0	15.6



NTL BEARINGS LTD.

Mass bearing	0.43 kg
--------------	---------