




NTL BEARINGS LTD.

7013 CB/P4A SKF High Speed Angular Contact Ball Bearings

Bearing No. 7013 CB/P4A

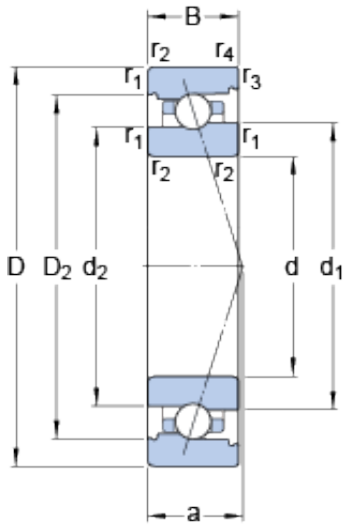

7013 CB/P4A Bearing 2D drawings and 3D CAD models

Size	100x65x18 mm
Bore Diameter	100 mm
Outer Diameter	65 mm
Width	18 mm
d	65 mm
D	100 mm
B	18 mm
d ₁	78 mm
d ₂	76.36 mm
D ₂	89.69 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	0.6 mm
a	20.1 mm
d _a - min.	71 mm
d _b - min.	71 mm
D _a - max.	94 mm
D _b - max.	96.8 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
d _n	79 mm
Basic dynamic load rating - C	15.6 kN
Basic static load rating - C ₀	12.9 kN
Fatigue load limit - P _u	0.55 kN
Limiting speed for grease	18000 r/min



NTL BEARINGS LTD.

Lubrication	
Limiting speed for oil lubrication	28000 mm/min
Ball - D_w	7.144 mm
Ball - z	27
G_{ref}	5.49 cm ³
Calculation factor - f_0	9.7
Preload class A - G_A	49 N
Preload class B - G_B	98 N
Preload class C - G_C	295 N
Calculation factor - f	1.07
Calculation factor - f	1
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.02
Calculation factor - f_{2C}	1.05
Calculation factor - f_{HC}	1
Preload class A	41 N/micron
Preload class B	54 N/micron
Preload class C	85 N/micron
d_1	78 mm
d_2	76.36 mm
D_2	89.69 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	71 mm
d_b min.	71 mm
D_a max.	94 mm
D_b max.	96.8 mm
r_a max.	1 mm
r_b max.	0.6 mm
d_n	79 mm



NTL BEARINGS LTD.

Basic dynamic load rating C	19.9 kN
Basic static load rating C_0	21.6 kN
Fatigue load limit P_u	0.55 kN
Attainable speed for grease lubrication	18000 r/min
Attainable speed for oil-air lubrication	28000 r/min
Ball diameter D_w	7.144 mm
Number of balls z	27
Reference grease quantity G_{ref}	5.49 cm ³
Preload class A G_A	49 N
Static axial stiffness, preload class A	41 N/ μ m
Preload class B G_B	98 N
Static axial stiffness, preload class B	54 N/ μ m
Preload class C G_C	295 N
Static axial stiffness, preload class C	85 N/ μ m
Calculation factor f	1.07
Calculation factor f_1	1
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.02
Calculation factor f_{2C}	1.05
Calculation factor f_{HC}	1
Calculation factor f_0	9.7
Mass bearing	0.47 kg