




NTL BEARINGS LTD.

S7014 CE/P4A SKF High Speed Angular Contact Ball Bearings

Bearing No. S7014 CE/P4A

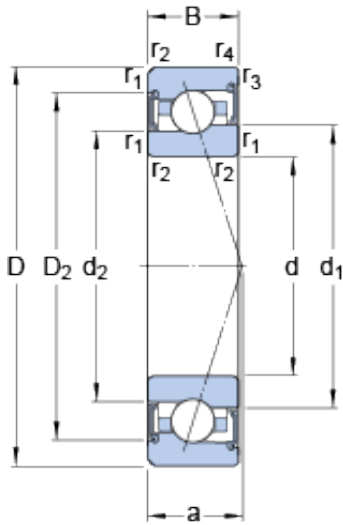

S7014 CE/P4A Bearing 2D drawings and 3D CAD models

Size	110x70x20 mm
Bore Diameter	110 mm
Outer Diameter	70 mm
Width	20 mm
d	70 mm
D	110 mm
B	20 mm
d ₁	84.3 mm
d ₂	81.6 mm
D ₂	98.6 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	0.6 mm
a	22.2 mm
d _a - min.	76 mm
d _a - max.	83.5 mm
d _b - min.	76 mm
d _b - max.	80.8 mm
D _a - max.	104 mm
D _b - max.	105.8 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
Basic dynamic load rating - C	23.8 kN
Basic static load rating - C ₀	18.3 kN
Fatigue load limit - P _u	0.78 kN



NTL BEARINGS LTD.

Limiting speed for grease lubrication	17000 r/min
Ball - D_w	9.525 mm
Ball - z	25
Calculation factor - f_0	8.4
Preload class A - G_A	130 N
Preload class B - G_B	380 N
Preload class C - G_C	760 N
Calculation factor - f	1.09
Calculation factor - f	1
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.03
Calculation factor - f_{2C}	1.05
Calculation factor - f_{HC}	1
Preload class A	57 N/micron
Preload class B	88 N/micron
Preload class C	120 N/micron
d_1	84.3 mm
d_2	81.6 mm
D_2	98.6 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	76 mm
d_a max.	83.5 mm
d_b min.	76 mm
d_b max.	80.8 mm
D_a max.	104 mm
D_b max.	105.8 mm
r_a max.	1 mm
r_b max.	0.6 mm
Basic dynamic load rating C	23.8 kN



NTL BEARINGS LTD.

Basic static load rating C_0	18.3 kN
Fatigue load limit P_u	0.78 kN
Attainable speed for grease lubrication	17000 r/min
Ball diameter D_w	9.525 mm
Number of balls z	25
Preload class A G_A	130 N
Static axial stiffness, preload class A	57 N/ μ m
Preload class B G_B	380 N
Static axial stiffness, preload class B	88 N/ μ m
Preload class C G_C	760 N
Static axial stiffness, preload class C	120 N/ μ m
Calculation factor f	1.09
Calculation factor f_1	1
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.03
Calculation factor f_{2C}	1.05
Calculation factor f_{HC}	1
Calculation factor f_0	8.4
Mass bearing	0.64 kg